



2020-12
Request for Bids
Marlboro Street Storm Sewer Project

The City of Edgerton, Wisconsin is requesting quotes from Contractors interested in the installing storm sewer on Marlboro Street.

Interested Contractors shall provide the city with written bids which also provide information regarding the firm's experience, references, equipment to be used and proposed schedule.

The proposal shall also include a completed and fully executed Bid Form.

All proposals may either be provided in hard copy enclosed within a sealed envelope and clearly labeled "**Marlboro Storm Sewer Project**" or emailed to jsalvo@cityofedgerton.com by the deadline noted below:

Deadline for receipt of proposals is **3:00 p.m. October 1, 2020.**

Interested parties should contact:

City of Edgerton
12 Albion St
Edgerton, WI 53534
Call 608-884-3341 or email jsalvo@cityofedgerton.com

The City of Edgerton reserves the right to contract with the Bidder that has been determined to be in the best interest of the City after full consideration of cost, schedule and overall value.

The City of Edgerton also reserves the right to reject any or all Bids and the right to adjust the schedule as may be required due to weather conditions.

PROJECT SPECIFICATIONS

The City of Edgerton Public Works Department is seeking proposals to install new 6" storm sewer in the road with laterals to capture sump pump discharge from the homes in the area.

Scope of Work for the project:

- a) Sawcut and remove up to 1,700 sq ft of asphalt
- b) Excavate and dispose of off site all spoils for a trench up to 340 feet
- c) Sawcut two (2) holes in existing 12" rcp large enough to accept 6" sdr26 pipe. Seal hole during pipe installation.
- d) Furnish and install a 6" x 4" wye at 12" rcp.
- e) Install up to 330' of 6" sdr26 pipe and 330' of 4" perf drain tile in trench.
- f) Sawcut and remove five (5) squares of sidewalk as determined by lateral lay out.
- g) Excavate and install five (5) 6" x 4" tees in main.
- h) Excavate and install up to 15' of 4" sdr26 off each "t", attempting to tunnel under existing curb and gutter.
- i) Backfill laterals with same soils in green areas.
- j) Backfill with $\frac{3}{4}$ " clear rock in sidewalk area.
- k) Replace concrete sidewalk.
- l) Backfill entire trench with $\frac{3}{4}$ " clear rock to bottom of existing asphalt.
- m) Patch Marlboro Street with same thickness asphalt to match existing asphalt and gutter.

PAYMENT

Price will include all labor and materials for the project. Payment will be made within 30-days of receipt of the submission of a completed invoice for the services billed in writing, with approval signoff of the Public Works Director or his designee.

Payment of each invoice shall automatically release any lien that the invoice may have provided against the City.

Payment will be made only for actual work performed and accepted in accordance with the contract.

Any scheduled item of work to be done and materials to be furnished may be increased, decreased, or omitted by the Municipal Services Director or his designee, and no claim for loss, anticipated profits, or costs incurred in anticipation of work not ultimately performed will be allowed due to such increase or decrease.



SAFETY

All activities under this Contract shall be executed in accordance with all applicable Federal, State and Local safety regulations. All workers of the selected Contractor shall be properly trained in safe operation of tools and equipment assigned to them for their use and shall be provided with proper safety and protective gear.

SCHEDULE CONSIDERATIONS


All work shall be coordinated through Howard Moser, Municipal Services Director. .

I:\Standards\Cedar Forms\Admin\File Structures\Basic with CAD Structure\dwg\DETAILS.dwg 7/15/2011 11:01:20 AM CDT

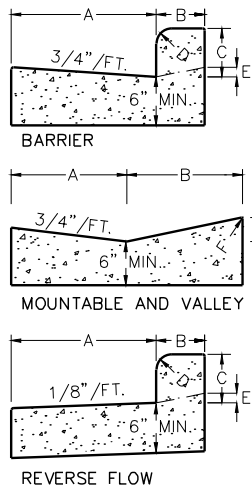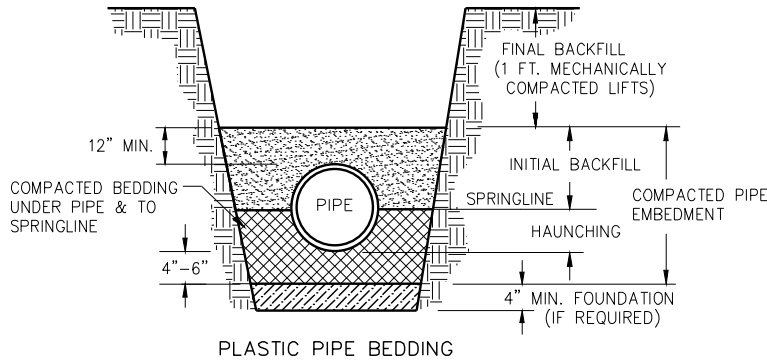


CURB TYPE	A	B	C	D	E	F
BARRIER						
18" B	12"	6"	6"	2"	1.5"	1/2"
24" B	18"	6"	6"	2"	1.5"	1/2"
30" B	24"	6"	6"	2"	1.5"	1/2"
MOUNTABLE						
24" M	12"	12"	-	-	2.50"	1/2"
30" M	18"	12"	-	-	2.75"	1/2"
36" M	24"	12"	-	-	6"	10"
VALLEY GUTTER						
36" V	18"	18"	-	-	1.5"	-
REVERSE FLOW						
24" B	18"	6"	6"	2"	1.5"	1/2"

CONCRETE CURB & GUTTER

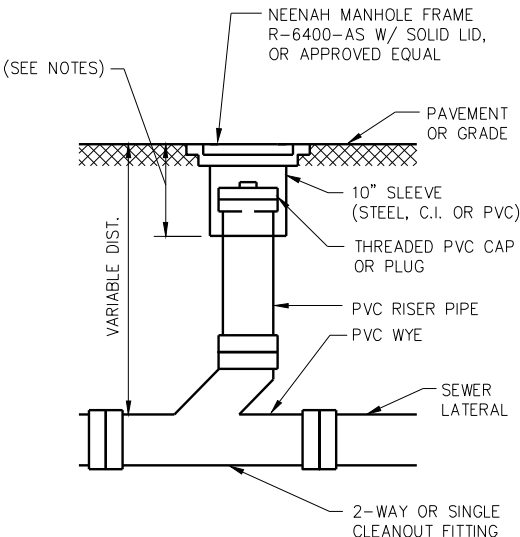


CLEANOUT IN TRAFFIC AREA
NO SCALE

- NOTES
- * BOTTOM OF FROST SLEEVE SHALL TERMINATE 12" ABOVE TOP OF DRAIN PIPE, OR 6" BELOW FROST DEPTH.
 - * CLEANOUTS IN PAVED AREA SHALL HAVE A 2'x2'x6" THICK CONCRETE PAD AROUND CASTING

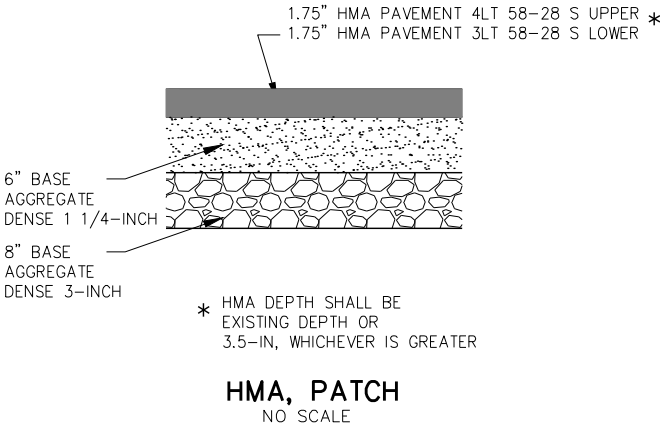

HMA, PATCH
NO SCALE

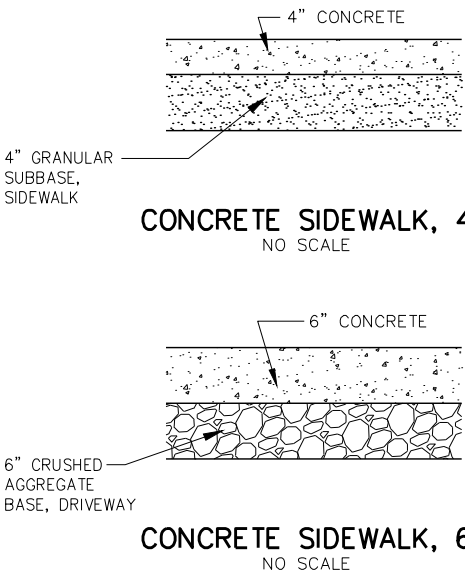

CONCRETE SIDEWALK, 4"
NO SCALE

CONCRETE SIDEWALK, 6"
NO SCALE

JOB NO. 4894-095
BOOK NO.
DRAWN BY JMP
CHECKED BY WAB
DATE SEPTEMBER 2020
REVISIONS
REFERENCE FILE
DRAWING FILE 00BASE_*.*

www.cedarcorp.com

800-472-7372

engineers • architects • planners • environmental specialists
land surveyors • landscape architects • interior designers

Cedar

corporation

2820 Walton Commons W.
Julesburg, CO 80732
970-354-0037
FAX 970-354-0037

624 Wilson Ave.
Morrison, CO 80461
715-235-9081
FAX 715-235-2727

CITY OF EDGERTON

MARLBORO STREET

STORM SEWER PROJECT

DETAILS

SHEET NO.
2 OF 2

CITY OF EDGERTON
MARLBORO STREET STORM SEWER PROJECT
UNIT PRICE BID SCHEDULE A

Item	Unit	Qty	Unit Price	Total
SAW CUTTING	L.F.	405		
ASPHALT AND CONCRETE PAVEMENT REMOVAL	S.Y.	130		
3" CRUSHED AGGREGATE BASE, ROADWAY	TON	65		
1.25" CRUSHED AGGREGATE BASE, ROADWAY	TON	50		
HMA PAVEMENT, 4 LT 58-28 S, 1.75" UPPER & 1.75" LOWER LAYER	TON	30		
CONCRETE CURB AND GUTTER, 30" BARRIER (PATCHING), AS ORDERED	L.F.	20		
CONCRETE SIDEWALK, 4"	S.F.	40		
STORM SEWER SERVICE LATERAL, PVC SDR 26, 4"	L.F.	66		
STORM SEWER SEWER, PVC SDR 26, 6"	L.F.	349		
CONNECT TO EXISTING STORM PIPE	EA.	2		
CLEANOUT	EA.	1		
PROJECT TOTAL BID SCHEDULE A				

(Write Out Project Total Using Words)

The Owner reserves the right to reject all bids.

Name of Bidder: _____

Address: _____

Phone Number: _____

Email Address: _____